


SC Uni-Boot Patch Chord



Specifications

Fiber Type:	SM (9/125), MM (50/125, 62.5/125)
Application Mode:	SM, MM, APC
Insertion Loss:	0.3dB or lower
Return Loss:	55dB or lower UPC; 65dB or lower APC
Telcordia:	GR-326-CORE Compliant
IEC:	IEC 61754-4
EU Regulations:	RoHS, REACH Compliant
Flammability Grade:	UL 94V-0

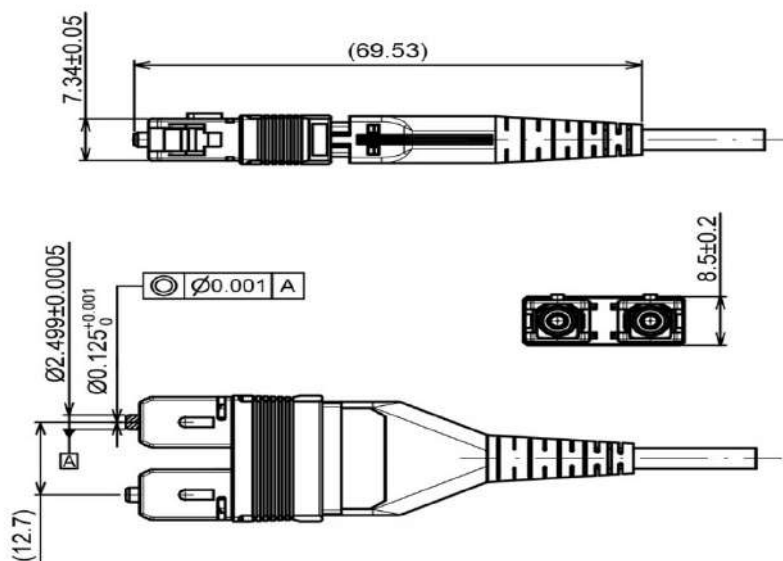

Naficon Liitin Oy

Lahdentie 7 D, 21660 NAUVO
Finland
Tel: +358 208 351 662
www.naficon.fi

Naficon Fiber Optic Manufacturing LLC

Shed-2, Nad Al Hammar
Dubai, UAE
Tel: +971 4 2514550
sales@naficon.ae
www.naficon.ae